

### MVK 8.10 SKM10X35 V4A (390 079)


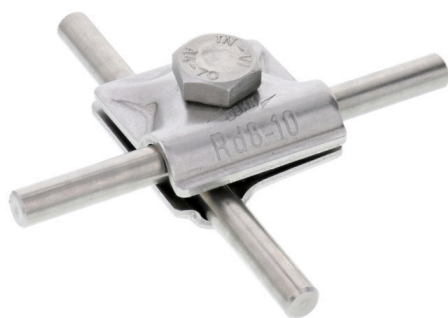


Figure without obligation



Clamp also suits for underground application.



Type	MVK 8.10 SKM10X35 V4A
Part No.	390 079 ✓
Material of clamp	StSt (V4A)
Clamping range Rd	8-10 mm
Connection (solid / stranded)	35-70 mm <sup>2</sup>
Material thickness (t1 / t2)	2.5 mm
Screw	● M10 x 35 mm
Material of screw / nut	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI:	316Ti / 316L / 316
Lightning current carrying capability (10/350 μs)	100 kA <sup>*)</sup>
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	4.7 kA
Weight	96 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364128996
PU	50 pc(s)

<sup>\*)</sup> For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.