



## RD 8 V2A R125M (860 908)

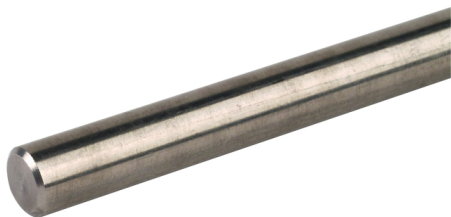


Figure without obligation

Stainless steel wire according to EN 62561-2, for lightning protection systems or equipotential bonding.

Type	RD 8 V2A R125M
Part No.	860 908 ✓
Diameter Ø conductor	8 mm
Cross-section	50 mm <sup>2</sup>
Material	StSt
Material No.	1.4301 / 1.4303
Standard	based on EN 62561-2
Conductivity	≥ 1.25 m / Ohm mm <sup>2</sup>
Resistivity	≤ 0.8 Ohm mm <sup>2</sup> / m
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	1.9 kA
Length tolerance	+/- 5%
Weight	395 g/m
Customs tariff number (Comb. Nomenclature EU)	72210010
GTIN	4013364019362
PU	125 m

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Conductor materials can only be supplied in the original coil weights.

Further conductor materials as specified in the standard series EN 62561-2 are available on request.